SYNTHETIC DEMONSTRATION DATA - NOT A REAL SITE

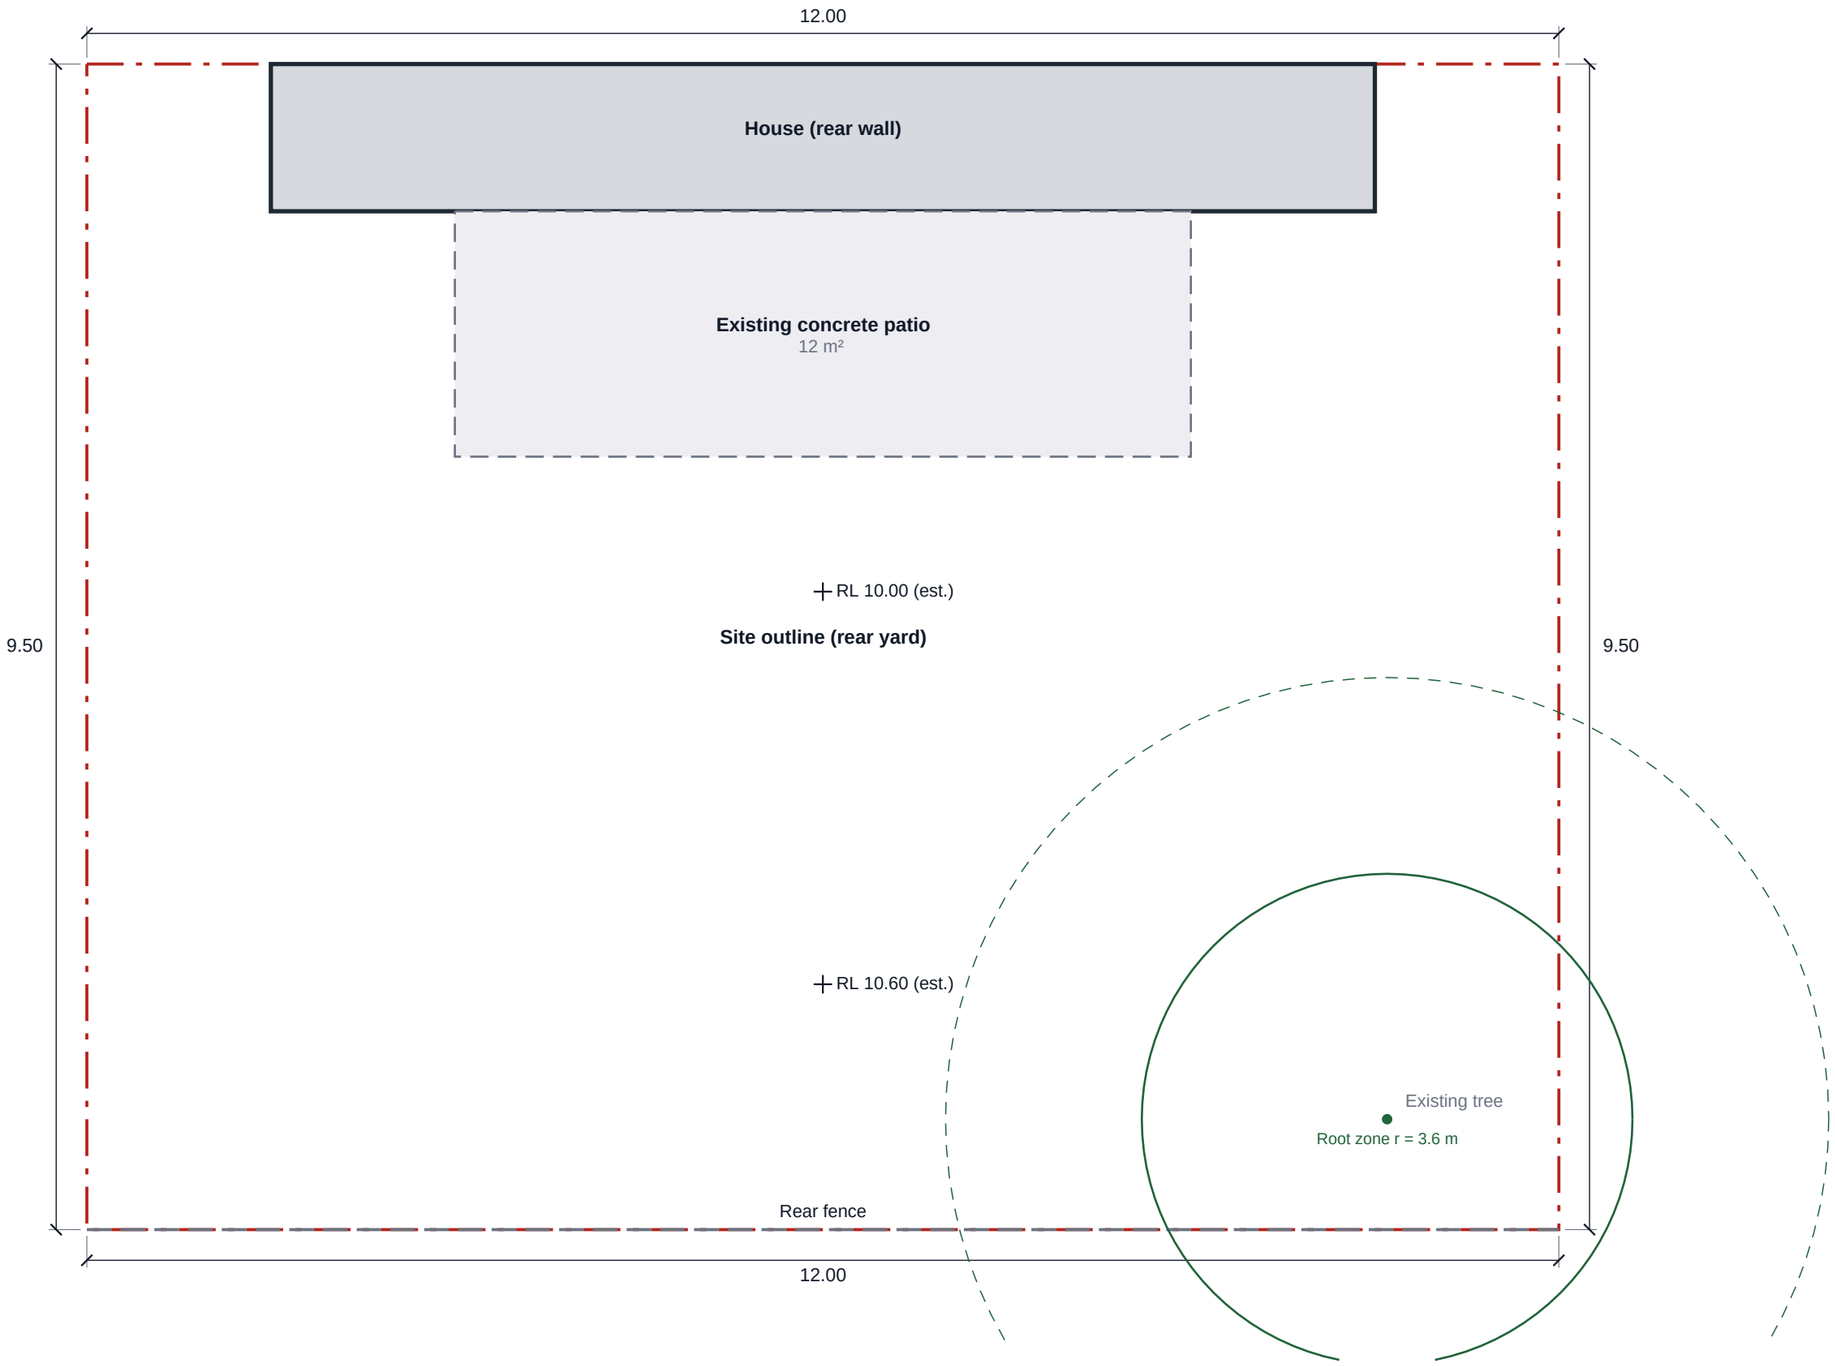

Scale 1:50 when printed at 100% (no "fit to page")

0 1 2 3 4 m

LEGEND

- Site outline (reference only)
- Building
- Existing feature
- Fence
- Tree
- Level marker

NOTES

Site outline is a reference line, not a legal boundary.
Positions with (est.) or ~ are estimates.
Underground services not shown.
North point not recorded.
Existing conditions as recorded on site.

Landscape Intelligence Studio

Project:	DEMO (synthetic): Residential Backyard Transformation
Site:	1 Example Street (synthetic address), Sydney
Customer:	Demo Customer (synthetic)
Project ID:	prj_demo_backyard

Existing site plan

Drawing no:	L-01
Revision:	0
Date:	2026-11-12
Scale:	1:50 @ A3

Status: Concept

Measurements:	not signed off
Engineering:	no approval recorded
Units:	metres unless shown as mm

Check all dimensions on site.

CONCEPT
NOT FOR CONSTRUCTION

Preliminary. Not a survey, engineering certificate or planning approval.

SYNTHETIC DEMONSTRATION DATA - NOT A REAL SITE

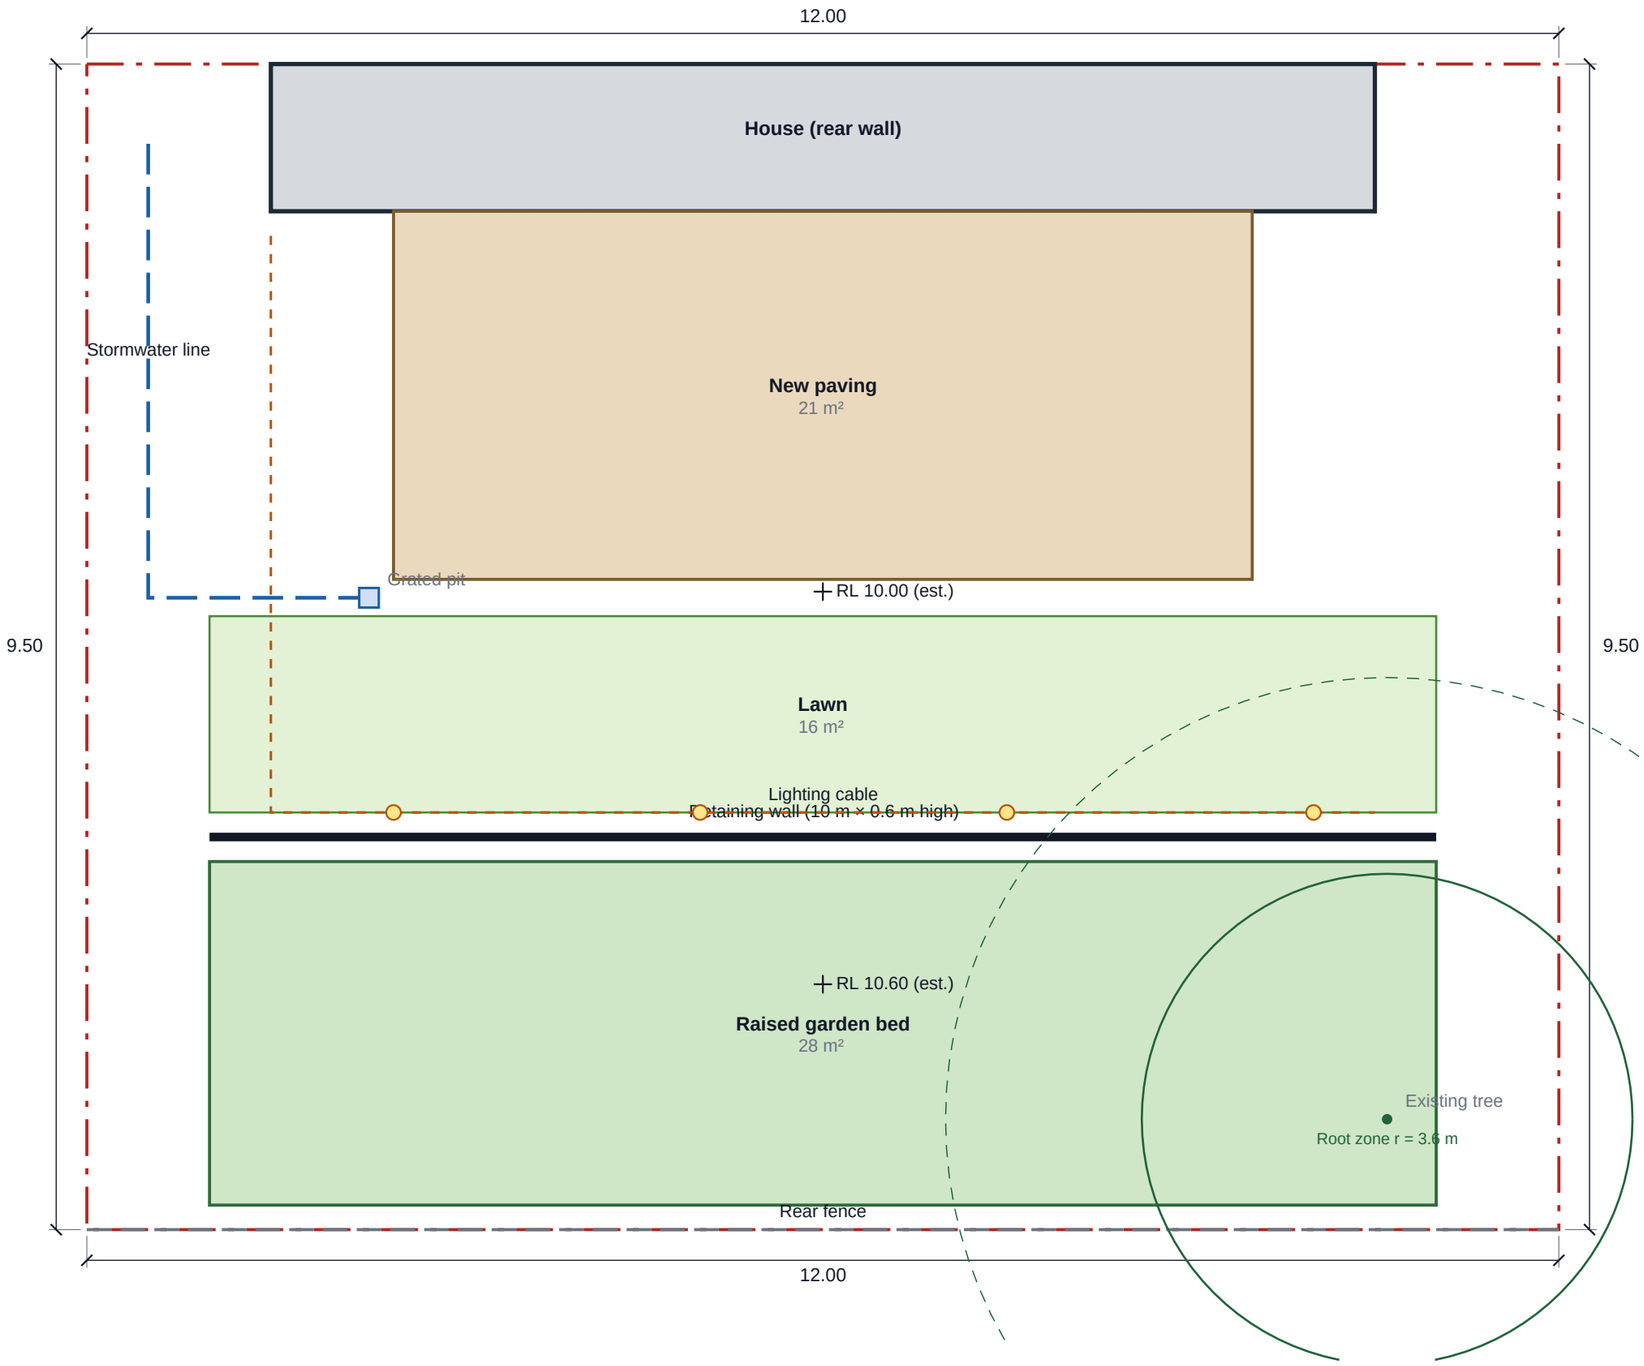

Scale 1:50 when printed at 100% (no "fit to page")

0 1 2 3 4 m

LEGEND

- Site outline (reference only)
- Building
- Existing feature
- Fence
- Tree
- Paving
- Turf
- Retaining wall
- Garden bed
- Drainage line (concept)
- Drainage pit
- Lighting cable (preliminary)
- Light
- Level marker

NOTES

Site outline is a reference line, not a legal boundary.
Positions with (est.) or ~ are estimates.
Underground services not shown.
North point not recorded.
Drainage and lighting routes are concept only.

Landscape Intelligence Studio
Project: DEMO (synthetic): Residential Backyard Transformation
Site: 1 Example Street (synthetic address), Sydney
Customer: Demo Customer (synthetic)
Project ID: prj_demo_backyard

Proposed landscape plan
Drawing no: L-02
Revision: 0
Date: 2026-11-12
Scale: 1:50 @ A3

Status: Concept
Measurements: not signed off
Engineering: no approval recorded
Units: metres unless shown as mm
Check all dimensions on site.

CONCEPT
NOT FOR CONSTRUCTION

Preliminary. Not a survey, engineering certificate or planning approval.

SYNTHETIC DEMONSTRATION DATA - NOT A REAL SITE

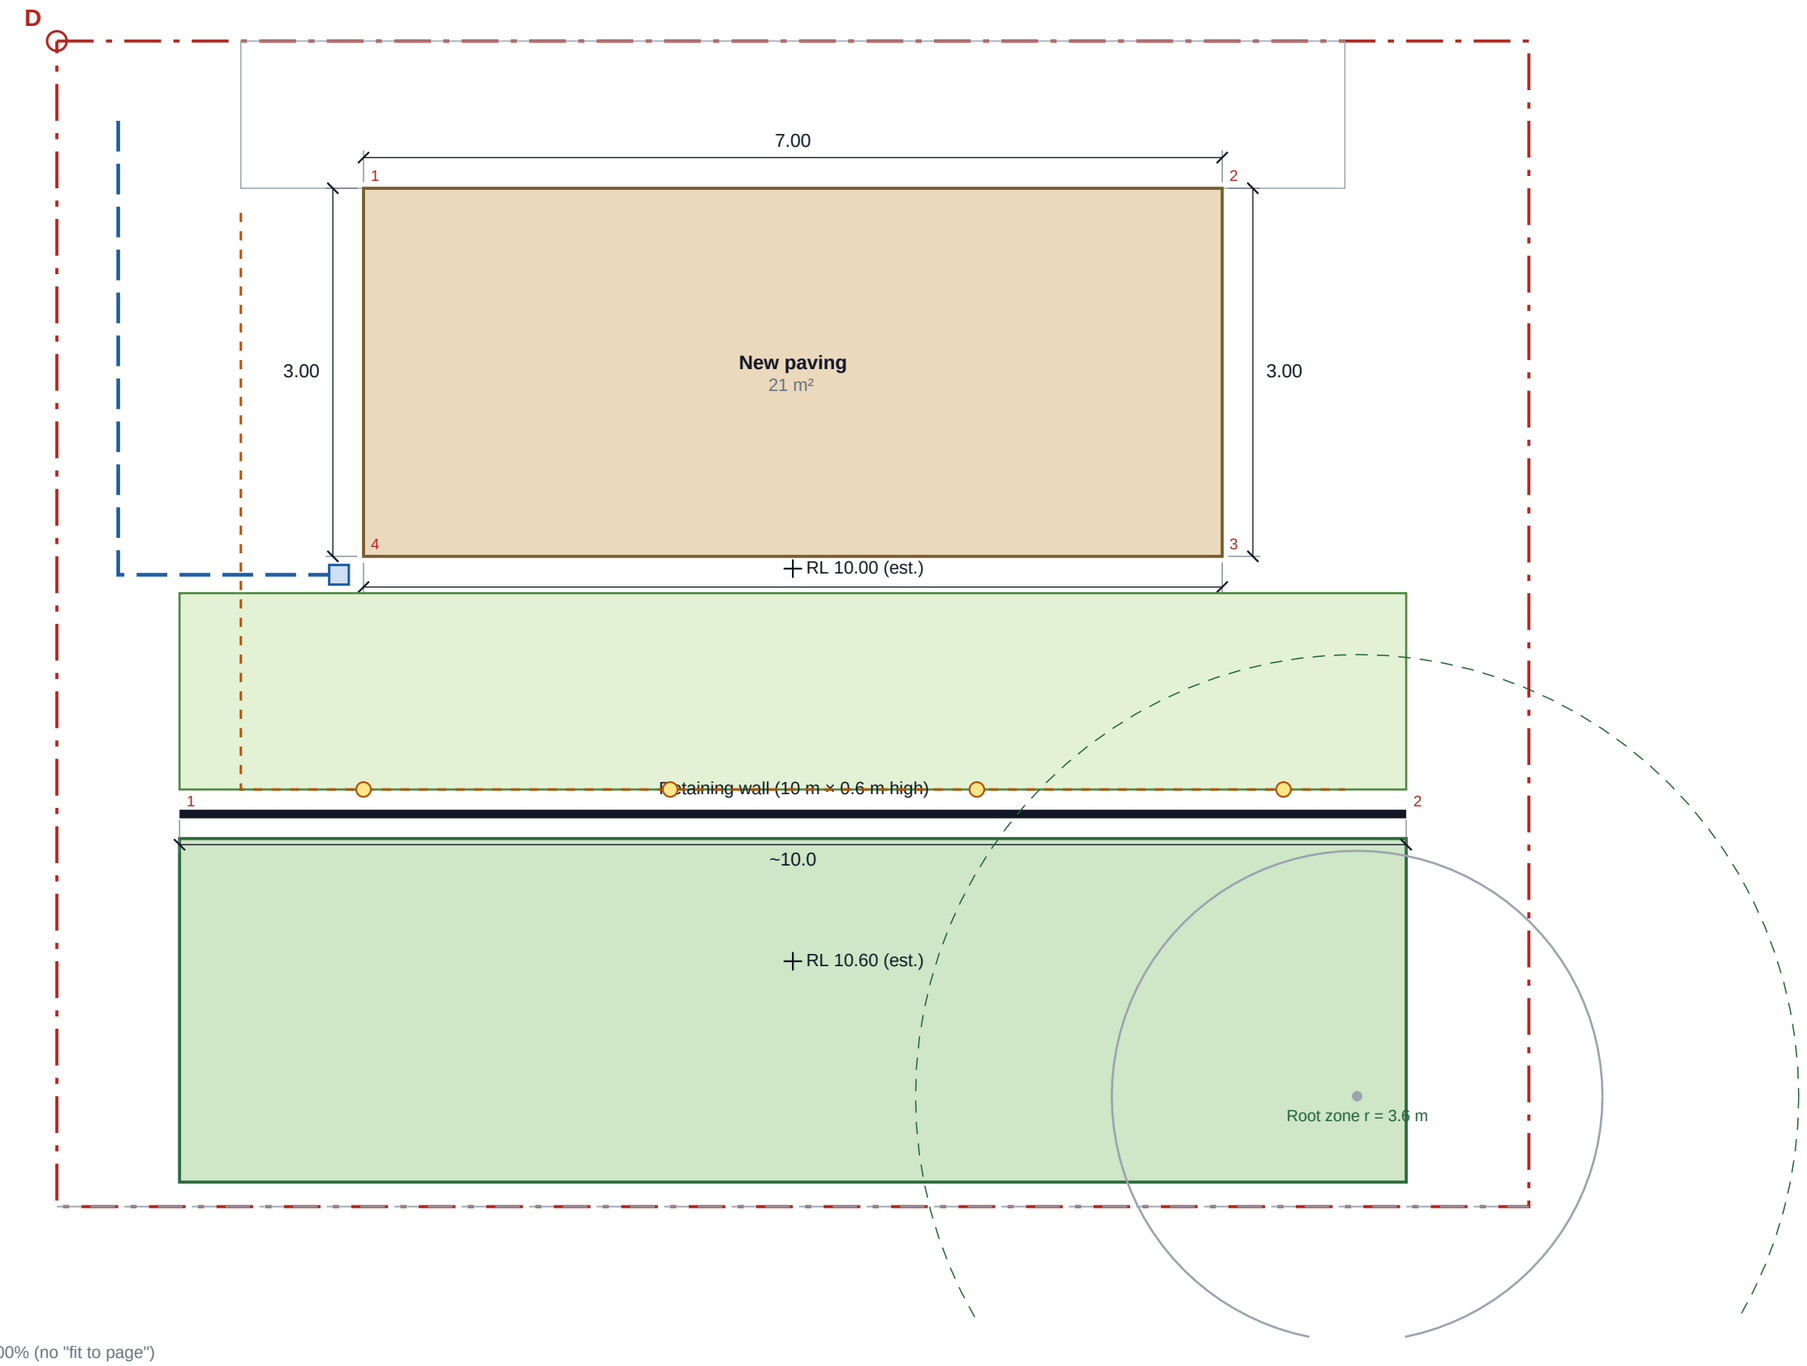

Scale 1:50 when printed at 100% (no "fit to page")

0 1 2 3 4 m

LEGEND

- Site outline (reference only)
- Building
- Existing feature
- Fence
- Tree
- Paving
- Turf
- Retaining wall
- Garden bed
- Drainage line (concept)
- Drainage pit
- Lighting cable (preliminary)
- Light
- Level marker

SET-OUT NOTES

Dimensions in metres.
Plain figures: verified on site.
Figures with ~ : estimates. Measure before set-out.
Datum: corner marked D.
Check diagonals for square.
North point not recorded.

SET-OUT POINTS

metres from datum D

Point	Across	Out
New paving 1	2.50	1.20
New paving 2	9.50	1.20
New paving 3	9.50	4.20
New paving 4	2.50	4.20
Retaining wall 1	1.00	6.30
Retaining wall 2	11.00	6.30

Landscape Intelligence Studio
Project: DEMO (synthetic): Residential Backyard Transformation
Site: 1 Example Street (synthetic address), Sydney
Customer: Demo Customer (synthetic)
Project ID: prj_demo_backyard

Dimensioned set-out plan
Drawing no: L-03
Revision: 0
Date: 2026-11-12
Scale: 1:50 @ A3

Status: Concept
Measurements: not signed off
Engineering: no approval recorded
Units: metres unless shown as mm
Check all dimensions on site.

CONCEPT
NOT FOR CONSTRUCTION

Preliminary. Not a survey, engineering certificate or planning approval.

SYNTHETIC DEMONSTRATION DATA - NOT A REAL SITE

ELEVATION 1:50

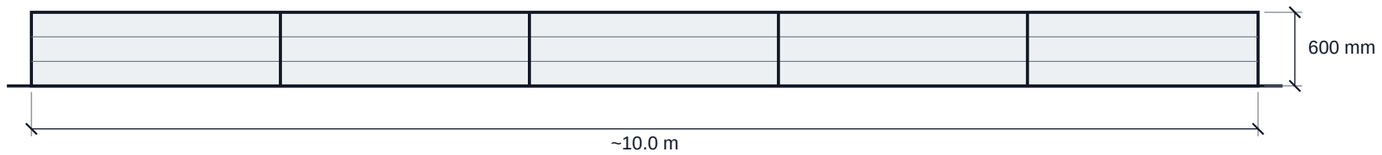

System: Concrete sleepers + steel posts
Material: Pioneer 2.0m x 200 x 75mm Charcoal Smooth reinforced concrete sleeper
Length 10 m (ESTIMATE: measure before ordering); exposed height 600 mm; retained height 600 mm
Wall face area 6 m²; 3 courses; 5 bays, 6 posts
Ground level in front: not recorded; behind: not recorded
Load behind wall: slope; soil: not recorded; distance to boundary: 1 m

ON SITE

1. Locate services. Set out wall line and check length.
2. Excavate. Do not undermine fences or structures.
3. Posts / base course to the approved detail only.
4. Fabric, ag pipe to outlet, drainage gravel as wall rises.
5. Backfill in layers. Grade surface so water runs away from the wall.

Landscape Intelligence Studio
Project: DEMO (synthetic): Residential Backyard Transformation
Site: 1 Example Street (synthetic address), Sydney
Customer: Demo Customer (synthetic)
Project ID: prj_demo_backyard

Retaining wall: elevation and site notes
Drawing no: L-04
Revision: 0
Date: 2026-11-12
Scale: as shown @ A3

Status: Concept
Measurements: not signed off
Engineering: no approval recorded
Units: metres unless shown as mm
Check all dimensions on site.

CONCEPT
NOT FOR CONSTRUCTION

Preliminary. Not a survey, engineering certificate or planning approval.

CONCEPT SECTION 1:10

CONCEPT ONLY - NOT FOR CONSTRUCTION

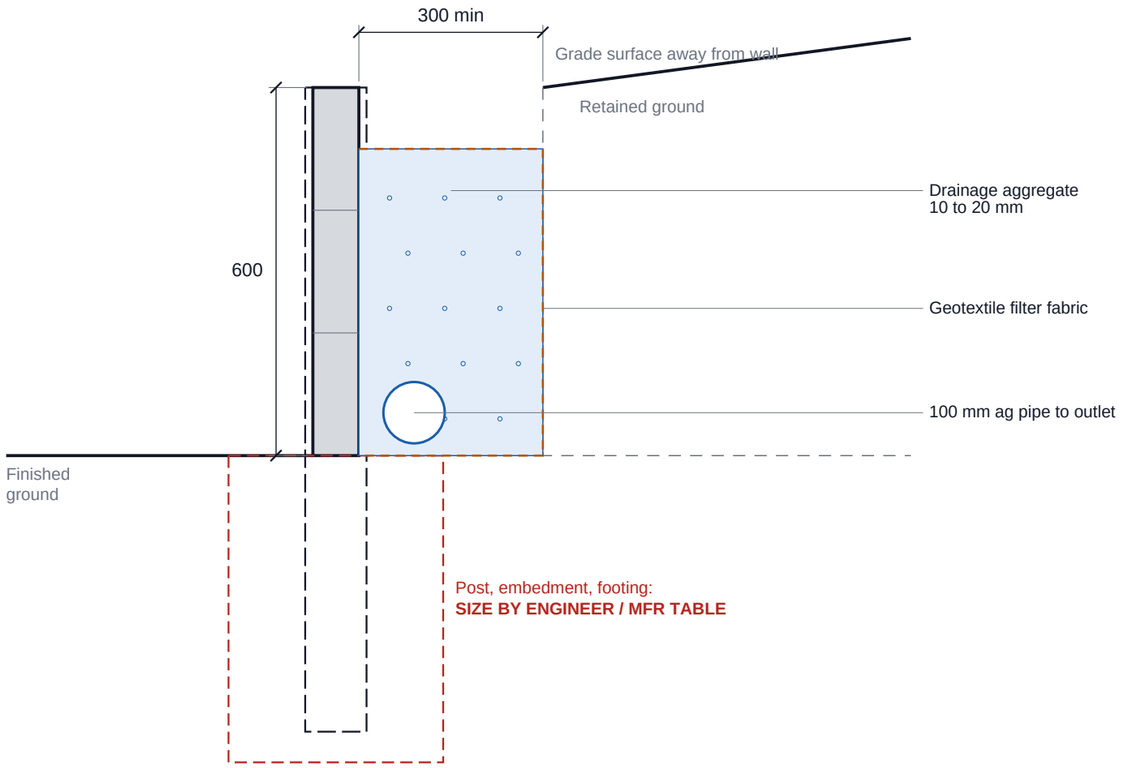

READ BEFORE USING THIS DETAIL

This section shows the arrangement of components only.

It contains no structural design. Post or footing sizes, embedment, reinforcement, bearing, sliding and overturning have not been checked.

Follow the wall system manufacturer installation guide for base, setback and maximum height.

Drainage zone width from manufacturer guidance (300 mm minimum). Outlet location to be confirmed on site.

Landscape Intelligence Studio
Project: DEMO (synthetic): Residential Backyard Transformation
Site: 1 Example Street (synthetic address), Sydney
Customer: Demo Customer (synthetic)
Project ID: prj_demo_backyard

Retaining wall: concept section
Drawing no: L-05
Revision: 0
Date: 2026-11-12
Scale: as shown @ A3

Status: Concept
Measurements: not signed off
Engineering: no approval recorded
Units: metres unless shown as mm
Check all dimensions on site.

CONCEPT
NOT FOR CONSTRUCTION

Preliminary. Not a survey, engineering certificate or planning approval.

SYNTHETIC DEMONSTRATION DATA - NOT A REAL SITE

LAYOUT 1:50

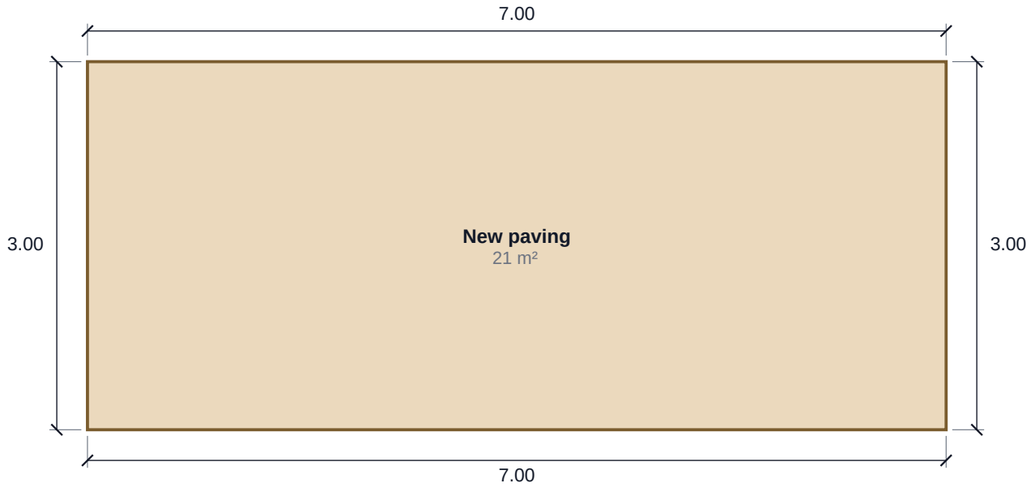

Scale 1:50 when printed at 100% (no "fit to page")

0 1 2 3 4 m

CONCEPT SECTION 1:5

Fall 1.5% to channel drain (to be confirmed)

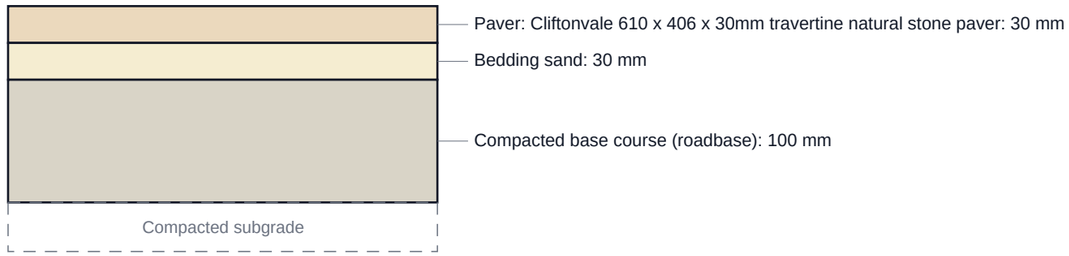

Area 21 m²; perimeter 20 m
Pattern: stretcher
Edge restraint to 100% of perimeter
Base depth is a pedestrian allowance from supplier guidance. Driveways and soft ground need a designed pavement.
Slip resistance of the paver has not been verified. Ask the supplier for an AS 4586 test report.
Paving must fall away from buildings and drain to the existing stormwater system.

Landscape Intelligence Studio
Project: DEMO (synthetic): Residential Backyard Transformation
Site: 1 Example Street (synthetic address), Sydney
Customer: Demo Customer (synthetic)
Project ID: prj_demo_backyard

New paving: layout and concept section
Drawing no: L-06
Revision: 0
Date: 2026-11-12
Scale: as shown @ A3

Status: Concept
Measurements: not signed off
Engineering: no approval recorded
Units: metres unless shown as mm
Check all dimensions on site.

CONCEPT
NOT FOR CONSTRUCTION

Preliminary. Not a survey, engineering certificate or planning approval.

SYNTHETIC DEMONSTRATION DATA - NOT A REAL SITE

Material	Supplier	Design qty	Order qty	Rounding / conversion	Used in
Cliftonvale 610 x 406 x 30mm travertine natural stone paver	bunnings	22.05 m²	90 ea	22.05 m² ÷ 0.2477 m² per unit; rounded up to 1 ea increments	New paving
Roadbase recycled DGB20 (RMS 3051), tipped	bcsands	2.31 m³	4 t	2.31 m³ × 1.6 t/m³; rounded up to 0.5 t increments	New paving
Washed river sand / paver bedding sand, tipped	bcsands	0.69 m³	1.5 t	0.69 m³ × 1.5 t/m³; rounded up to 0.5 t increments	New paving
Paver jointing sand (bag)	generic	4.2 bag	5 bag	rounded up to 1 bag increments	New paving
Paver edge restraint (per metre)	generic	20 m	20 m	-	New paving
Sir Walter DNA Certified buffalo turf	bcsands	16.8 m²	17 m²	rounded up to 1 m² increments	Lawn
Turf Gro top dressing and organic underlay loam, tipped	bcsands	1.68 m³	2.5 t	1.68 m³ × 1.2 t/m³; rounded up to 0.5 t increments	Lawn
Pioneer 2.0m x 200 x 75mm Charcoal Smooth reinforced concrete sleeper	bunnings	15 ea	15 ea	-	Retaining wall
Galvanised steel H joiner post - size and length per engineering	generic	6 ea	6 ea	-	Retaining wall
Concrete for post footings (strength per engineering)	generic	unknown	INCOMPLETE	Missing input: see bill of quantities	Retaining wall
Blue metal aggregate 20mm (drainage gravel), tipped	bcsands	1.98 m³	3 t	1.98 m³ × 1.5 t/m³; rounded up to 0.5 t increments	Retaining wall
Agi pipe with sock 100mm x 20m	bcsands	13 m	1 roll	13 m ÷ 20 m per roll; rounded up to 1 roll increments	Retaining wall
Geotextile geofabric drain matting 2000mm x 50m, 140 g/m2	bcsands	13.2 m²	1 roll	13.2 m² ÷ 100 m² per roll; rounded up to 1 roll increments	Retaining wall
Organic garden mix (AS 4419)	bcsands	8.82 m³	9 m³	rounded up to 0.5 m³ increments	Raised garden bed
Garden mulch (bulk)	generic	2.1 m³	2.5 m³	rounded up to 0.5 m³ increments	Raised garden bed
Lomandra longifolia "Tanika" (140mm pot)	generic	78 ea	78 ea	-	Raised garden bed
PVC stormwater pipe 100mm (per metre)	generic	5.83 m	6 m	rounded up to 1 m increments	Stormwater line
Stormwater pit 450 x 450 with grate	generic	1 ea	1 ea	-	Grated pit
Low-voltage garden lighting cable (per metre)	generic	15.07 m	16 m	rounded up to 1 m increments	Lighting cable
Low-voltage LED garden spike light	generic	4 ea	4 ea	-	Garden light 1, Garden light 2, Garden light 3, Garden light 4

Order quantities include waste allowances and pack rounding. INCOMPLETE means an input is missing: see the bill of quantities.
Supplier stock and prices are not confirmed by this document.

Landscape Intelligence Studio
Project: DEMO (synthetic): Residential Backyard Transformation
Site: 1 Example Street (synthetic address), Sydney
Customer: Demo Customer (synthetic)
Project ID: prj_demo_backyard

Materials schedule (purchase quantities)
Drawing no: L-07
Revision: 0
Date: 2026-11-12
Scale: not to scale @ A3

Status: Concept
Measurements: not signed off
Engineering: no approval recorded
Units: metres unless shown as mm
Check all dimensions on site.

CONCEPT
NOT FOR CONSTRUCTION

Preliminary. Not a survey, engineering certificate or planning approval.

SYNTHETIC DEMONSTRATION DATA - NOT A REAL SITE

Element	Item	Formula	Inputs	Net	Waste	Qty
New paving	Pavers	paved area	area: 21 m²; pattern: stretcher	21	5%	22.05 m²
New paving	Base course	area × compacted base depth	area: 21 m²; base depth: 100 mm	2.1	10%	2.31 m³
New paving	Bedding sand	area × bedding depth	area: 21 m²; bedding depth: 30 mm	0.63	10%	0.69 m³
New paving	Jointing sand	area ÷ coverage per bag	area: 21 m²; coverage: 5 m² per bag	4.2	0%	4.2 bag
New paving	Edge restraint	perimeter × restrained share	perimeter: 20 m; restrained share: 100%	20	0%	20 m
New paving	Excavation for paving	area × (base + bedding + paver thickness)	area: 21 m²; depth: 160 mm	3.36	0%	3.36 m³
Lawn	Turf	turf area	area: 16 m²	16	5%	16.8 m²
Lawn	Turf underlay	area × underlay depth	area: 16 m²; depth: 100 mm	1.6	5%	1.68 m³
Retaining wall	Wall face area	length × exposed height	length: 10 m; exposed height: 0.6 m	6	0%	6 m²
Retaining wall	Concrete sleepers	bays × courses, where bays = ceil(length ÷ post spacing) and courses = ceil(exposed height ÷ sleeper height)	length: 10 m; exposed height: 0.6 m; sleeper: 2 m long × 0.2 m high; post spacing: 2.03 m; bays: 5; courses: 3	15	0%	15 ea
Retaining wall	Steel posts	bays + 1	bays: 5; changes of direction: 0	6	0%	6 ea
Retaining wall	Post footing concrete	posts × pi × (hole diameter ÷ 2)² × hole depth	posts: 6; hole diameter: unknown; hole depth: unknown	unknown	10%	unknown
Retaining wall	Drainage aggregate behind wall	length × drainage zone width × retained height	length: 10 m; zone width: 0.3 m; retained height: 0.6 m	1.8	10%	1.98 m³
Retaining wall	Subsoil drain (ag pipe)	wall length + outlet allowance	length: 10 m; outlet allowance: 3 m	13	0%	13 m
Retaining wall	Geotextile filter fabric	length × (retained height + 2 × zone width)	length: 10 m; retained height: 0.6 m; zone width: 0.3 m	12	10%	13.2 m²
Retaining wall	Excavation for wall and drainage zone	length × (zone width + 0.15 m wall allowance) × retained height	length: 10 m; retained height: 0.6 m	2.7	0%	2.7 m³
Raised garden bed	Garden soil	area × soil depth	area: 28 m²; soil depth: 300 mm	8.4	5%	8.82 m³
Raised garden bed	Mulch	area × mulch depth	area: 28 m²; mulch depth: 75 mm	2.1	0%	2.1 m³
Raised garden bed	Plants	ceil(area ÷ spacing²)	area: 28 m²; spacing: 0.6 m centres	78	0%	78 ea
Stormwater line	Drainage pipe / channel	drawn length	length: 5.55 m	5.55	5%	5.83 m
Stormwater line	Trench excavation	length × trench width × trench depth	length: 5.55 m; width: 0.3 m; depth: 0.4 m	0.67	0%	0.67 m³
Grated pit	Drainage pit	count		1	0%	1 ea
Lighting cable	Lighting cable	drawn route length	length: 13.7 m	13.7	10%	15.07 m
Garden light 1	Light fitting	count		1	0%	1 ea
Garden light 2	Light fitting	count		1	0%	1 ea
Garden light 3	Light fitting	count		1	0%	1 ea
Garden light 4	Light fitting	count		1	0%	1 ea

Quantities are calculated from the drawing geometry. "unknown" means a required dimension has not been provided.

Landscape Intelligence Studio
Project: DEMO (synthetic): Residential Backyard Transformation
Site: 1 Example Street (synthetic address), Sydney
Customer: Demo Customer (synthetic)
Project ID: prj_demo_backyard

Bill of quantities (with formulas)
Drawing no: L-08
Revision: 0
Date: 2026-11-12
Scale: not to scale @ A3

Status: Concept
Measurements: not signed off
Engineering: no approval recorded
Units: metres unless shown as mm
Check all dimensions on site.

CONCEPT
NOT FOR CONSTRUCTION

Preliminary. Not a survey, engineering certificate or planning approval.

SYNTHETIC DEMONSTRATION DATA - NOT A REAL SITE

#	Stage	What to do	HOLD POINT
1	Before starting	Before You Dig enquiry lodged and services located • Check set-out dimensions against this drawing on site • Confirm access route and protect existing surfaces • Fence off tree protection zones	Do not excavate until services are located.
2	Demolition	Remove items marked "to be demolished" • Cart away and dispose to a licensed facility	
3	Set-out	Set out from the datum corner shown on the set-out plan • Check diagonals for square • Mark levels from the site datum	
4	Retaining wall	Excavate for wall and drainage zone • Install posts / base course to the approved detail • Place wall units course by course • Lay filter fabric, ag pipe to outlet, then drainage aggregate as the wall rises • Backfill in layers; cap	Footing and post details must be on an approved engineering or manufacturer detail before pouring.
5	Drainage	Trench to grade • Lay pipe and pits; connect by licensed plumber/drainer • Test with water before backfilling	Connection point and discharge to be confirmed before covering.
6	Lighting first-fix	Lay conduits / cable along the marked route before surfaces go down • Leave tails at each fitting position	Licensed electrician for any wiring work.
7	Paving	Excavate to formation level • Place and compact base course in layers • Screed bedding sand • Lay pavers to pattern with falls away from the house • Install edge restraint; fill joints; compact; clean	
8	Garden beds and planting	Install edging • Place garden soil to depth shown • Set out plants at spacing shown, plant and water in • Mulch to depth shown	
9	Turf	Spread and level underlay • Lay turf, butt joints, roll and water in	
10	Lighting fit-off	Fit lights, connect and test • Aim and adjust at night with the customer	
11	Completion	Clean site • Record actual quantities, hours and variations in Project Performance • Walk through with the customer	

Landscape Intelligence Studio
Project: DEMO (synthetic): Residential Backyard Transformation
Site: 1 Example Street (synthetic address), Sydney
Customer: Demo Customer (synthetic)
Project ID: prj_demo_backyard

Construction sequence and hold points
Drawing no: L-09
Revision: 0
Date: 2026-11-12
Scale: not to scale @ A3

Status: Concept
Measurements: not signed off
Engineering: no approval recorded
Units: metres unless shown as mm
Check all dimensions on site.

CONCEPT
NOT FOR CONSTRUCTION

Preliminary. Not a survey, engineering certificate or planning approval.

SYNTHETIC DEMONSTRATION DATA - NOT A REAL SITE

Type	Item	Finding	Who must review / why
Measure on site	Retaining wall retained height	Measure the ground-level difference across Retaining wall (retained height) at its highest point.	Retained height decides the engineering and approval pathway as well as quantities.
Measure on site	Retaining wall length	Measure the length of Retaining wall between its two ends.	Wall length drives sleepers or blocks, posts, drainage and labour.
Measure on site	Raised garden bed side 1	Measure side 1 of Raised garden bed (corner 1 to corner 2).	Area drives material, base and labour quantities.
Measure on site	Raised garden bed side 2	Measure side 2 of Raised garden bed (corner 2 to corner 3).	Area drives material, base and labour quantities.
Measure on site	Raised garden bed diagonal	Measure one diagonal of Raised garden bed (corner 1 to corner 3).	A diagonal confirms the shape is square.
Measure on site	Retaining wall exposed height	Record ground levels in front of and behind Retaining wall (dumpy or laser level).	Confirms the wall height along its length and the fall for drainage.
Measure on site	Site outline (rear yard) side 3	Measure side 3 of the site reference outline (corner 3 to corner 4).	Everything else is positioned from the site outline.
Measure on site	Site outline (rear yard) side 4	Measure side 4 of the site reference outline (corner 4 to corner 1).	Everything else is positioned from the site outline.
Measure on site	Lawn side 1	Measure side 1 of Lawn (corner 1 to corner 2).	Area drives material, base and labour quantities.
Measure on site	Lawn side 2	Measure side 2 of Lawn (corner 2 to corner 3).	Area drives material, base and labour quantities.
Potential issue requiring review	Contractor licence (structural landscaping)	Above $5,000. No licence number recorded in Settings.	Confirm the licence is current and covers structural landscaping (NSW licence check).
Potential issue requiring review	Written contract and Home Building Compensation cover	Over $20,000: large-job contract and HBCF certificate required before starting or taking payment.	Business owner to confirm contract type and insurance. See also https://www.nsw.gov.au/housing-and-construction/building-or-renovating-a-home/preparing/contracts
Insufficient information	Planning pathway: Retaining wall	Height 0.60 m is within 600 mm and the recorded site attributes do not rule out exempt development. Remaining standards in clause 2.30 have not been checked automatically.	Read clause 2.30 of the Codes SEPP on legislation.nsw.gov.au against the final design, or ask the council or a registered certifier.
Potential issue requiring review	Structural review: Retaining wall	Surcharge recorded behind the wall (slope). Loads beyond level backfill need engineering review regardless of height.	Confirm ground conditions on site; engage an engineer if there is any slope, load, fill, water or nearby structure.
Insufficient information	Planning pathway: New paving	Not all Subdivision 28 standards can be confirmed from the recorded data (zone, landscaped-area ratios, drainage connection).	Check Subdivision 28 of the Codes SEPP, and confirm where paving runoff will drain.
Insufficient information	Slip resistance: New paving	No slip-resistance test classification is recorded for the selected paver.	Ask the supplier for an AS 4586 wet pendulum test report for the exact product and finish.
Potential issue requiring review	Tree protection: Existing tree	Notional root zone radius 3.6 m (12 × 0.3 m). Proposed works inside it: Lawn, Retaining wall, Raised garden bed, Lighting cable.	Check Northern Beaches Council tree controls before pruning, removal or excavation near trees; engage an arborist for encroachments.
Potential issue requiring review	Underground services before excavation	Proposed work includes excavation. Underground services are not known to this software.	Lodge a BYDA enquiry; pothole or use a locator before machine excavation.
Potential issue requiring review	Outdoor lighting and electrical work	Lighting is in scope. Cable routes shown are preliminary only.	Licensed electrician to confirm supply, protection, cable type and burial, and to do any wiring work.
Potential issue requiring review	Stormwater and drainage	Drainage routes are concept only. The connection point, its capacity and the right to discharge are not verified.	Licensed plumber/drainer to confirm the connection; council or a hydraulic engineer where on-site detention, easements or charged lines are involved.
Insufficient information	Council controls: Northern Beaches Council	Council-specific controls are not encoded in this software.	Look up the address in the NSW Planning Portal Spatial Viewer, order a section 10.7 certificate if needed, and check the title for easements.
Potential issue requiring review	Property boundary	The drawn boundary is a reference line only.	Use a survey plan (or engage a registered surveyor) before building on or near a boundary.

Automated checks are screening aids. They are not planning approval, certification or engineering sign-off.

Landscape Intelligence Studio
Project: DEMO (synthetic): Residential Backyard Transformation
Site: 1 Example Street (synthetic address), Sydney
Customer: Demo Customer (synthetic)
Project ID: prj_demo_backyard

Measurements to check and review flags
Drawing no: L-10
Revision: 0
Date: 2026-11-12
Scale: not to scale @ A3

Status: Concept
Measurements: not signed off
Engineering: no approval recorded
Units: metres unless shown as mm
Check all dimensions on site.

CONCEPT
NOT FOR CONSTRUCTION

Preliminary. Not a survey, engineering certificate or planning approval.